



MeoGuard DFX 10x42 LRF

MeoGuard DFX 10x42 LRF with the integrated laser rangefinder can be an appropriate aid for determining the exact distance of the target, whether in an open space or on rugged terrain. In addition to the rangefinder, the binocular combines outstanding optical properties that ensure a clear image. MeoGuard DFX 10x42 LRF is exceptionally resistant to moisture, dust, temperature fluctuation and shocks.

FEATURES


- MEOLUX
- MEODROP
- WATERPROOF
- FOGPROOF
- EQUIVALENT HORIZONTAL RANGE
- ELEVATION MEASUREMENTS
- NITROGEN PURGED

Magnification	10x	
Objective Lens Diameter (mm)	42	
Exit Pupil Diameter (mm)	4.2	
Eye Relief (mm)	17	
Reticle (Y/N)	N	
Field Of View (°)	6.2	
Field Of View (m/1000m)	108	
Dioptric Correction (D)	-4	+3
Minimum Focus Distance (m)	4	
Measured Integral Transmission Daylight (%)	L 85	R 80
Measured Integral Transmission Twilight (%)	L 82	R 82
Twilight Factor	20.5	
Interpupillary Distance (mm)	54 - 76	
Recoil Resistance (g)	100	
Power Supply (V)	3	
Battery Lifetime* (no of measurements)	min. 1 200	
Automatic Shut Down (Y/N/sec.)	Y/10	
Laser Wavelength (nm)	905	
Measurable Distance - reflective target (m)	12 - 2380	
Measure Accuracy up to 1000m (m)	±1	
Measure Accuracy over 1000m (m)	±2	
Max Angle Reading (°)	±65	
Measure Accuracy Up to ± 30° (°)	±1	
Laser Class	1	
Mark Brightness (cd/m ²)	2 000	
Operational Temperature Range (°C)	-25	+55
Storage Temperature Range (°C)	-40	+70
Moisture Resistance [+40°C] (%)	92	
Water Resistance (m/hrs)	1/2	
Dimensions** L x H x W (mm)	154 x 84 x 154	
Weight*** (g)	992	

* 1pc - 3 V, size CR 2 and ambient temperature +20°C

** With covers

*** With covers and batteries

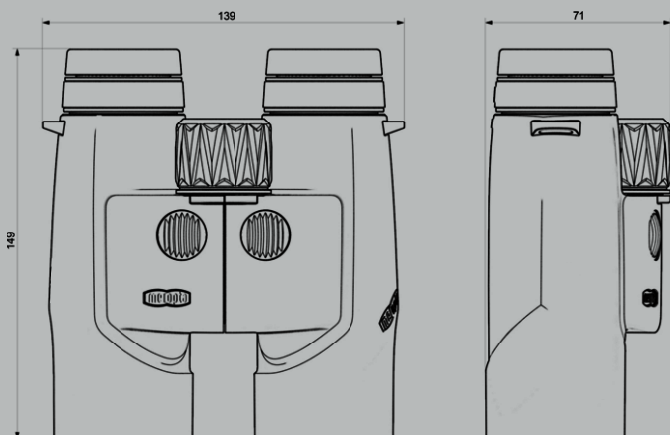

MEOPTA SYSTEMS s.r.o.
Kabelíkova 1, 750 02 Přerov
Česká republika

Telefon: +420 581 241 111
E-mail: meopta@meopta.com
www.meopta.com



MEOPTA SYSTEMS s.r.o.
Kabelíkova 1, 750 02 Přerov
Česká republika

Telefon: +420 581 241 111
E-mail: meopta@meopta.com
www.meopta.com